Instruction Manual & User Guide

Torero 3 Wheel Stroller

Illustrations are representative only.
Design and style may vary.

IMPORTANT! RETAIN FOR FUTURE REFERENCE

CONTENT

Page 3 Warnings

Page 4 Component list

ASSEMBLING THE STROLLER

Page 5 Opening stroller

Page 6 - 7 Wheels assembly

Page 8 Bumper bar

USING THE STROLLER

Page 9 Canopy

Front swivel wheel

Page 10 Operating brakes

Adjusting handle

Page 11 Adjusting legrest

Adjusting backrest

Page 12 Securing your child

Page 13 Adjusting harness height

Page 14 Tether strap

Raincover

Page 15 Folding stroller

MAINTENANCE AND CONTACTS

Page 16 Product care and maintenance

Contact details

Note:

- The weight of the child using this stroller should not be more than **17kg.**
- Total weight for the shopping basket should be more than **4kg.**
- Maximum weight for the pocket should not be more than **1kg.**

These instructions detail the safe use, assembly and maintenance of your product. Please read these instructions carefully and ensure that they are followed at all times. Failure to do so could result in serious injury or death.

⚠ WARNING TO AVOID INJURY OR DEATH:

- **FOLLOW THE MANUFACTURE'S INSTRUCTIONS.**
- **ALWAYS APPLY THE BRAKES WHENEVER THE STROLLER IS STATIONARY.**
- **DO NOT LEAVE CHILDREN UNATTENDED.**
- **DO NOT CARRY EXTRA CHILDREN OR BAGS ON THIS STROLLER.**
- **MAKE SURE CHILDREN ARE CLEAR OF ANY MOVING PARTS IF YOU ADJUST THE STROLLER, OTHERWISE THEY MAY BE INJURED.**
- **SECURE THE CHILD IN THE HARNESS AT ALL TIMES AND ENSURE THAT THE SAFETY HARNESS IS ADJUSTED FIRMLY BUT COMFORTABLY TO THE CHILD'S BODY.**
- A harness can form loops that may be a strangulation hazard, never leave harness straps connected when not fitted to a child in the stroller.
- Use the tether strap to prevent the stroller rolling away.
- Do not allow children to stand on the seat or footrest.
- Do not attempt to lift the stroller by the bumper bar.
- Remove the child from the stroller before going up or down stairs or escalators.
- Engage front wheel swivel locks when travelling on rough or uneven surfaces.
- Inflate tyre to 28psi/2.0Bar (195kPa). Over inflation may result in tyre blowout.
- Regularly inspect the stroller for any parts that are loose, broken, torn or missing. Attend to the problem as soon as it is noticed.
- Use only those accessories which are supplied by Dorel Australia and approved for use with this stroller.
- Do not use the stroller near an open fire, barbecue or exposed flame.
- This product is not intended for commercial use.
- Do not run or jog with this stroller.

Component List:

Accessories included: Raincover

Assembling: Torero 3 Wheel Stroller

OPENING STROLLER

- If the stroller has a security tie, please remove it.
- Release the storage latch, as per **Figure 1A**.
- To unfold the stroller, simultaneously lift handle **(A)** while resting your foot on the bar beneath the back of the shopping basket **(B)** until the locking mechanism engages, as per **Figure 1B.**

Figure 1A

Figure 1B

Assembling: Torero 3 Wheel Stroller (cont.)

TO ATTACH REAR AXLE

- Align the rear axle over the rear leg tubes, as per **Figure 2A**.
- Push the rear axle on the rear leg tubes until the locking pin mechanism engages, as per **Figure 2B**.

Note: This process has to be even on both sides to avoid jamming.

Figure 2A

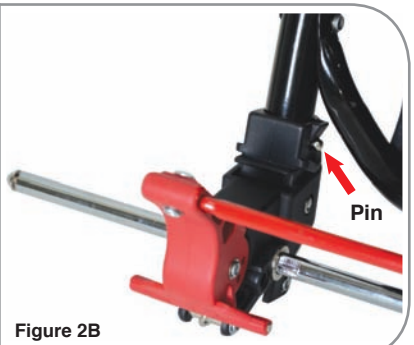

Figure 2B

TO FIT REAR WHEEL ASSEMBLY

- Slide rear wheel onto the axle, as per **Figure 3A**.
- Press the metal tab and push wheel until it locks **Figure 3B**.
- Repeat for other side.

Note: To remove the rear wheel assembly.
Press and hold the metal tab, as per Figure 3B. Remove rear wheel from the axle. Repeat on the other side.

Figure 3A

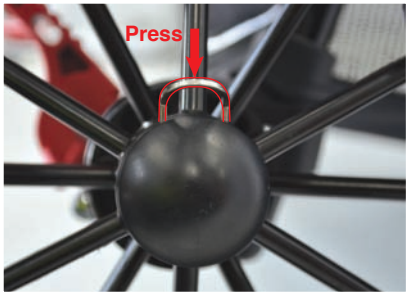

Figure 3B

Assembling: Torero 3 Wheel Stroller (cont.)

TO FIT FRONT WHEELS

- Lay the open stroller with the handle on the floor and the fork facing upwards as per **Figure 4A**.
- Align the wheel assembly to the front forks.
- Push the two black plastic connectors over the front wheel fork tubes, as per **Figure 4B**.
- The front wheel assembly will be locked in place when the two locking pins fully engage, as per **Figure 4C**.

Note: To detach the front wheel assembly.
Push the two locking pins in while pulling the plastic connectors off the front wheel forks.

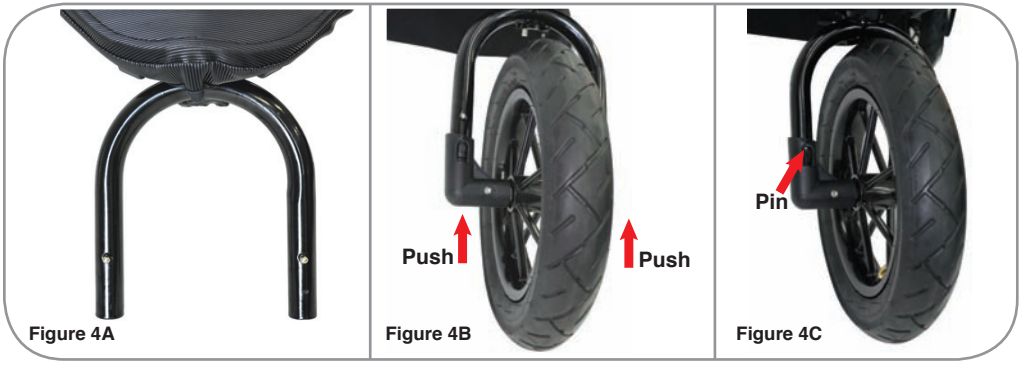

Figure 4A Figure 4B Figure 4C

Assembling: Torero 3 Wheel Stroller (cont.)

BUMPER BAR

- Open the swivel clips fitted to each side of the bumper bar.
- Align bumper bar with the frame, as per **Figure 5A.**
- Clip the ends of the bumper bar onto the frame, as per **Figure 5B.**
- Close the clips on both sides, as per **Figure 5C.**

Note: To remove bumper bar, open the clips and separate from frame.

Figure 5A

Figure 5B

Figure 5C

TO ATTACH CROTCH PAD

- Wrap the crotch pad around the bumper bar and attach the press stud, as per **Figure 6.**

Note: To detach the front wheel assembly.
Push the two locking pins in while pulling the plastic connectors off the front wheel forks.

Figure 6

Using: Torero 3 Wheel Stroller

CANOPY

- Pull the front edge of the canopy to open, as per **Figure 7A & 7B.**

Note: To close canopy, simply push backwards.
Note: The canopy is permanently attached to the stroller.

Figure 7A

Figure 7B

FRONT SWIVEL WHEEL

- Position front wheel, as per **Figure 8A**
- **TO LOCK:** Push the swivel lock upwards, as per **Figure 8B.**
- **TO UNLOCK:** Press the swivel lock downwards, as per **Figure 8C.**

Figure 8A

Figure 8B

Figure 8C

Using: Torero 3 Wheel Stroller

OPERATING BRAKES

- To apply the brakes. Press down firmly on the brake bar using the ball of your foot, as per **Figure 9A.**
- To release the brakes. Lift the brake bar until the brakes have fully disengaged. See **Figure 9B.**

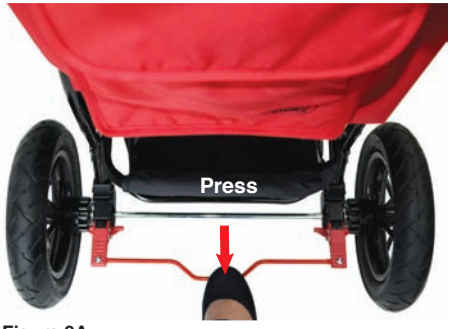

Figure 9A

Figure 9B

WARNING

APPLY ALL THE BRAKES WHENEVER YOU PARK THE STROLLER.

ADJUSTING HANDLE

- Press both adjustment buttons simultaneously and rotate to the desired position, as per **Figure 10.**

Note: Listen for click.

Figure 10

Using: Torero 3 Wheel Stroller

ADJUSTING THE LEGREST

- Press both adjustment buttons simultaneously and rotate to the desired position, as per **Figure 11.**

Note: Listen for click.

Figure 11

ADJUSTING THE BACKREST

- Pull on the lever, as per **Figure 12A & 12B** and set the backrest to the desired position**.**

Note: The backrest can be adjusted to 3 different positions.

Figure 12A

Figure 12B

Using: Torero 3 Wheel Stroller

SECURING YOUR CHILD

- The harness strap can be adjusted by moving each straps's slider **(A)**, as per **Figure 13A**.
- The buckle is released by pressing centre button, as per **Figure 13B**.

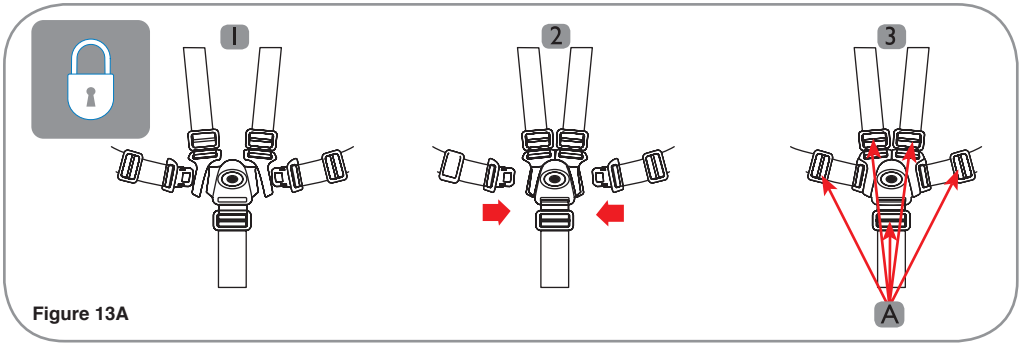

Figure 13A

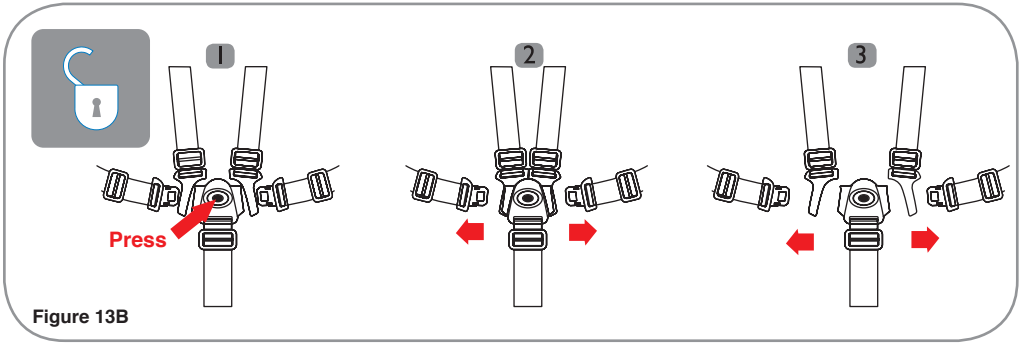

Figure 13B

WARNING

USE THIS HARNESS AT ALL TIMES.

A FIVE-POINT HARNESS IS PROVIDED TO SECURE YOUR CHILD.

WHEN NOT IN USE DISCONNECT SHOULDER STRAPS FROM THE WAIST STRAP AND BUCKLE.

Using: Torero 3 Wheel Stroller

ADJUSTING HARNESS HEIGHT

- Undo the buckle.
- Feed both shoulder straps through the seat pad and loop, as per **Figure 14A**.
- Feed the shoulder straps back through upper slot in the seat pad only, as per **Figure 14B.**
- Attach the buckle assembly, as per **Figure 13B** on page **12**.

Figure 14A

Figure 14B

Note: When harness is used in the lower slots. Please make sure that the harness are feed, as per Figure 15.



Figure 15

Using: Torero 3 Wheel Stroller

TETHER STRAP

⚠ WARNING

- Correct use of the tether strap will prevent stroller runaway and possible injury to the stroller occupant.
- Whenever a child is in the stroller and brakes are not engaged, the large loop should be around your wrist, as per **Figure 16**.

Figure 16

RAINCOVER

- Spread the raincover over the stroller and around the handle
- Attach the velcros 3 places, as per **Figure 17.**
- Attach front hook, as per **Figure 17.**
- Repeat on the other side

Figure 17

Using: Torero 3 Wheel Stroller

FOLDING STROLLER

- Fold the canopy.
- Unlock the front swivel wheel.
- Apply all brakes.
- Adjust the seat backrest to full layback position.
- Pull the folding locks up and simultaneously press down to fold the stroller, as per **Figure 18A**.
- Fold the stroller, as per **Figure 18B**.
- Attach the storage latch, as per **Figure 18C.**

Note: Lift handle to check that lock has fully engaged.

Figure 18A

Figure 18B

Figure 18C

PRODUCT CARE AND MAINTENANCE

- Always store in a clean and dry place.
- Clean the frame by wiping with a damp cloth.
- Do not use abrasives, bleach or strong detergents.
- Spot clean fabrics with warm water and mild soap.
- Ensure fabric is dry before storing.
- Occasionally clean and lubricate wheels and axles with a light lubricating oil.
- Regularly check for loose parts and tighten when required.
- Damaged or broken parts should be immediately replaced.

CUSTOMER SERVICE

Please contact our Customer Service Department if you experience a problem with this product or require assistance:

AUSTRALIAN CUSTOMERS

Email sales@dorel.com.au
Web www.dorel.com.au
Phone 1 (03) 8311 5300
Address 655-685 Somerville Road
Sunshine West, Vic, 3020
Phone 2 1300 809 526 (local call cost)
Hours 8:30 am – 4:30 pm,
Monday to Friday
Postal Dorel Australia Pty Ltd
P.O. Box 1260
Sunshine West, Victoria,
3020
Australia

NEW ZEALAND CUSTOMERS

customerservice@igc.co.nz
www.dorel.com.au
(09) 274 1040
14 Sir William Avenue, East
Tamaki, Auckland, 2013.
0800 628 000 (Toll Free)
8:00 am – 4:00 pm,
Monday to Friday.
IGC Dorel New Zealand Ltd
P.O. Box 82377 Highland Park
Mt Wellington
New Zealand

Specifications are subject to change without notice.
Copy or reproduction without permission is prohibited.
© 2013 Dorel Australia Pty Ltd. All Rights Reserved.
www.dorel.com.au